

Стойки для закусок SNK80-B

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: iah@nt-rt.ru || сайт: <https://isa.nt-rt.ru/>

Snack display cabinet with low deck

H 117-135

P 80

L 100-125-150-175-200



Tempered glass with extra clear finish with Led lighting. Available in two heights H117 and H135

Glass shelves (with LED lighting option)

Tilt front glass for ease of cleaning

TN RS - Static

TN RS - Static with refrigerated storage

TN RS PC - Static and hot plate convertible

TN RS PC - Static and hot plate convertible
with refrigerated storage

TN RV - Ventilated

TN RV - Ventilated with refrigerated storage

TN RV PC - Ventilated and hot plate convertible

TN RV PC - Ventilated and hot plate convertible
and refrigerated storage

TN RV CH - Ventilated chocolate display

TN RV CH - Ventilated chocolate display
with refrigerated storage

TC S - Dry heat

TC BM - Bainmarie



R290

Closing system with slides in transparent methacrylate
with easy sliding system. Stainless steel worktop.



Steel cabinet base
with adjustable feet.
Wheels optional.

SNK80-B

Snack display cabinet with low deck corner unit

H 117-135

P 80

L TDX150-TSX150

Tempered glass with extra clear finish with Led lighting. Available in two heights H117 and H135.

Tilt front glass for ease of cleaning

Glass shelves (with LED lighting option)



TN RV - Ventilated

TN RV PC - Ventilata and hot plate convertible

TC S - Dry heat

TN RS - Static

TN RS PC - Static and hot plate convertible

TN RV CH - Ventilated chocolate display



R290

Closing system with slides in transparent methacrylate with easy sliding system. Stainless steel worktop.



Steel cabinet base with adjustable feet. Wheels optional.

SNK80-B

Snack display cabinet with low deck **Dry heat**

H 117-135

P 80

L 100-125-150-175-200

TDX150 - TSX150

Top in Laminam™
ceramic material
dark grey finish



The display deck accommodates a hot plate made of scratch-resistant layered ceramic with heated glass, which is easily removable for cleaning thanks to the stainless steel handle.

The operating temperature on the hot plate is adjustable by means of an electronic control unit up to a maximum of 80°C.

Snack display cabinet with low deck Bain-marie


H 117-135

P 80


L 100-125-150




L100



L125



L150



Glass structure configurations

Tilt front glass



**Glass structure
with tilt front,
LED lighting
and sliding doors**

H 117



5.700 K
4.000 K

Tilt front glass

Intermediate shelves
with lighting and heating option



**Glass structure
with tilt front,
LED lighting
and sliding doors**


H 135



5.700 K
4.000 K


SNK80-B

Operator side

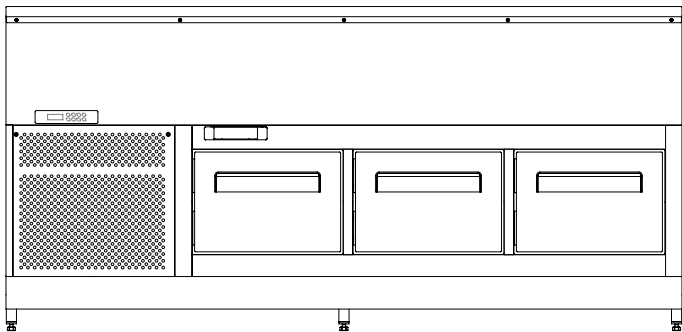

TN refrigerated storage

Module	UCB	UCR
length	(plug-in)	(remote)
100	-	-
125	-	2-door
150	2-door	2-door
175	2-door	3-door
200	2 or 3 door	2 or 3 door
TDX	-	-
TSX	-	-

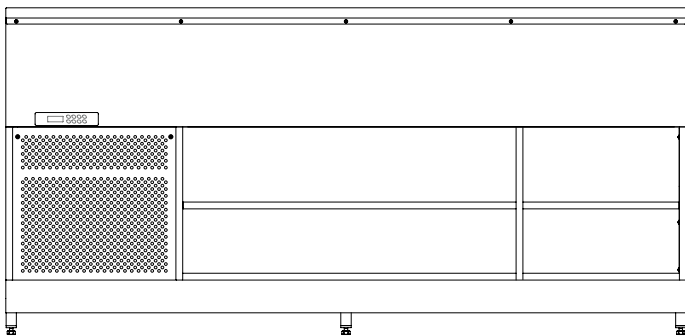

Open storage

Open storage
with height adjustable shelves.

Customization



Refrigerated well
with stainless steel
AISI 304 finish.




Display deck, front profile
and side profiles can be
customized.

Black RAL 9004
RAL choice

Cross sections

TN RS

TN RS PC

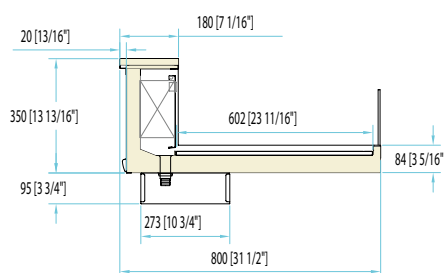


Well

H 117-135


P 80

L 100-125-150-175-200


TDX150-TSX150

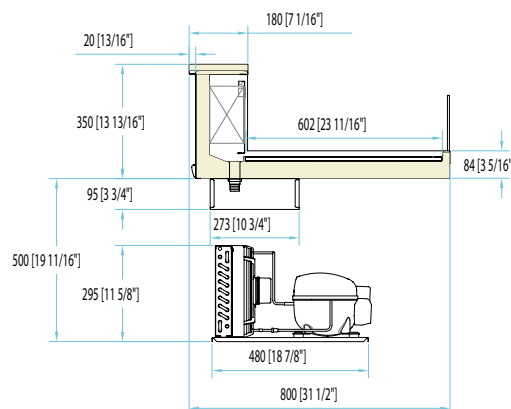


Well with factory-connected condensing unit

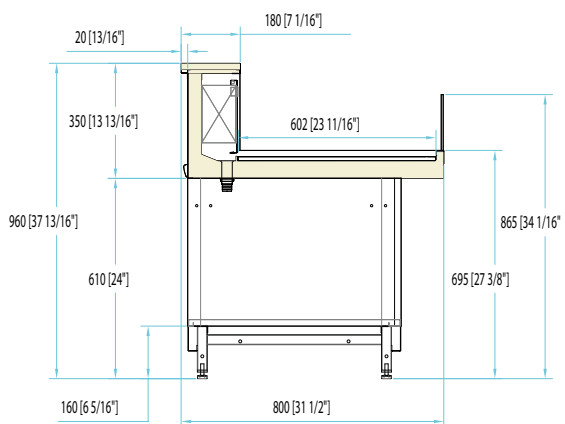


Well on neutral counter base

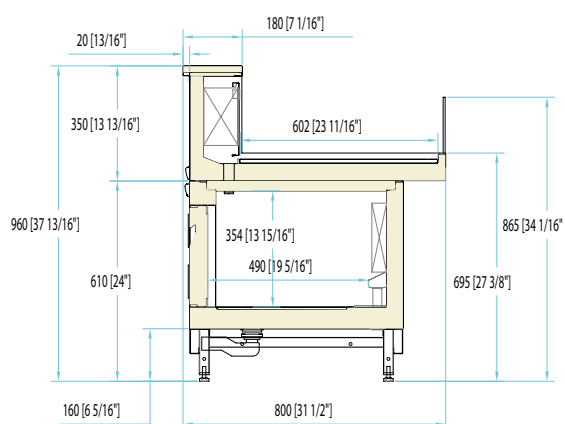

Well on refrigerated storage counter base

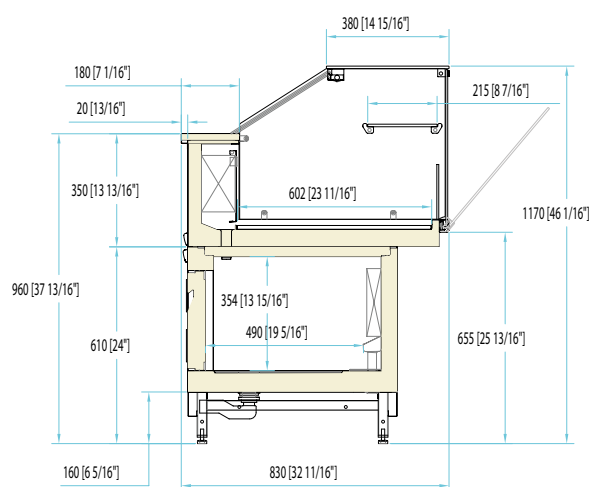

H117 Display cabinet with lighted tilt glass structure and refrigerated storage

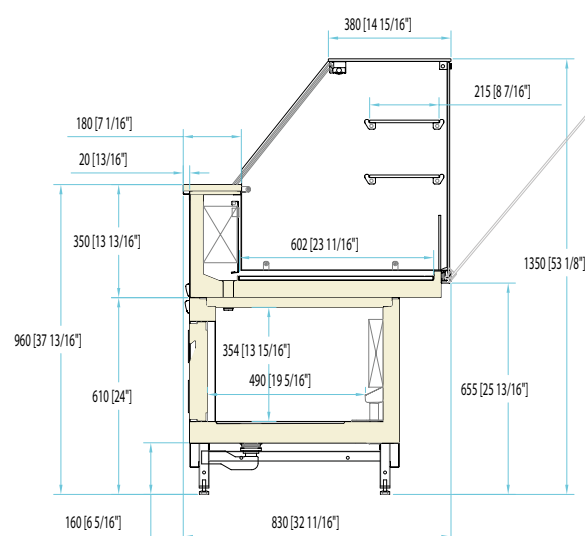


H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Cross sections

TN RV

TN RV PC

TN RV CH

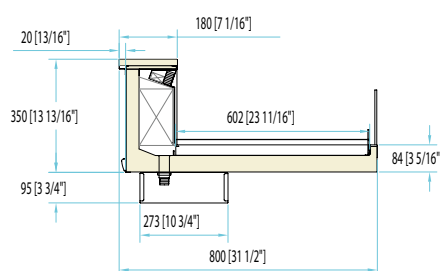


Well

H 117-135


P 80

L 100-125-150-175-200


TDX150-TSX150

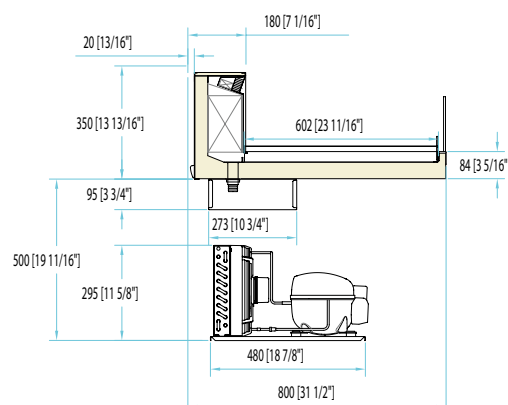


Well with factory-connected condensing unit

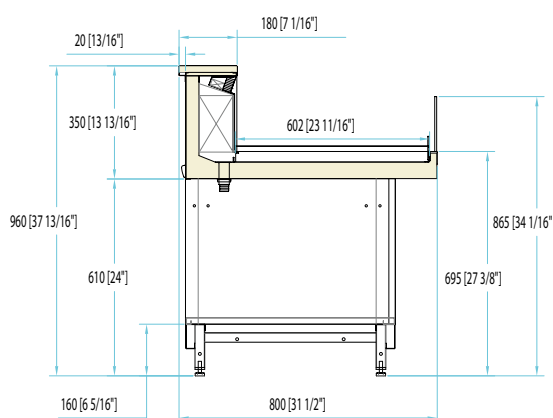


Well on neutral counter base

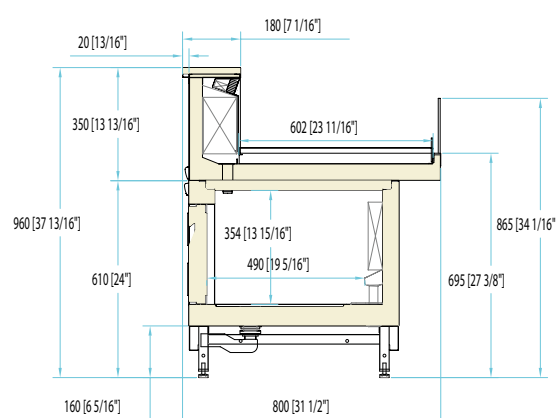

Well on refrigerated storage counter base

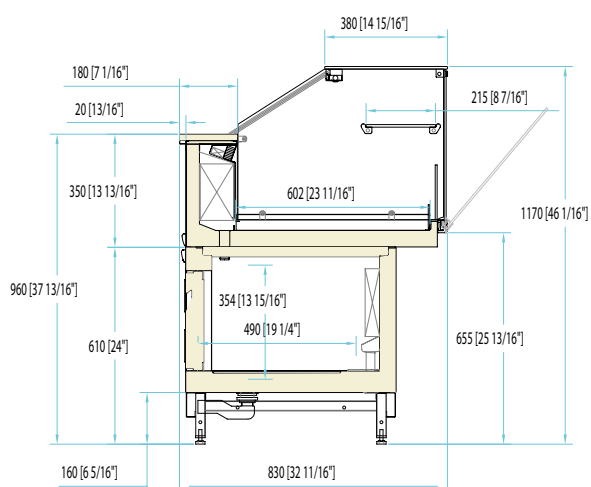


H117 Display cabinet with lighted tilt glass structure and refrigerated storage

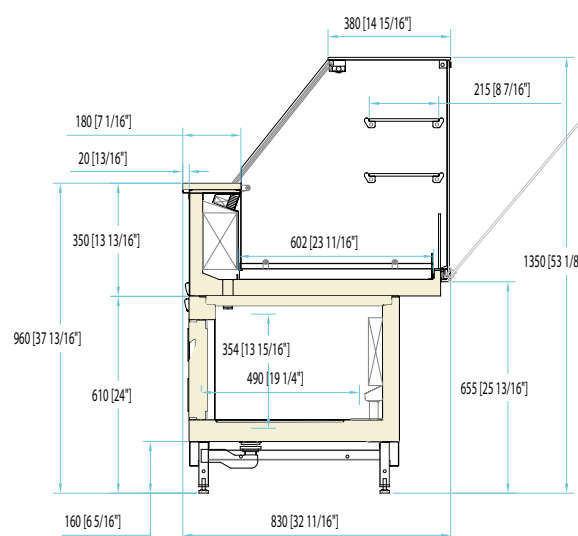

H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Cross sections TC S

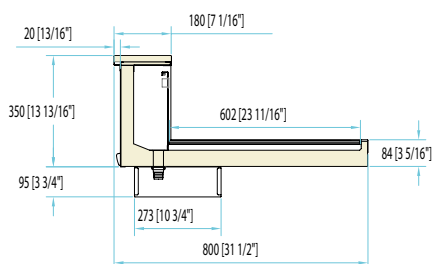


Well

H 117-135


P 80

L 100-125-150-175-200


TDX150-TSX150

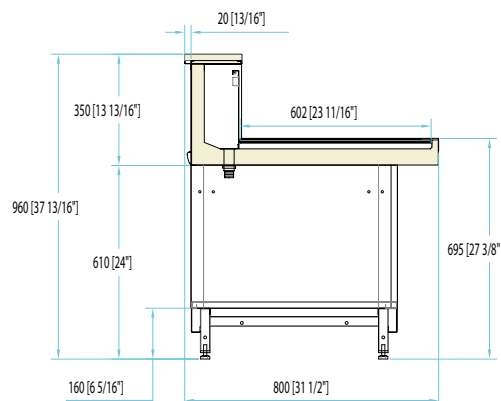

Well on neutral counter base

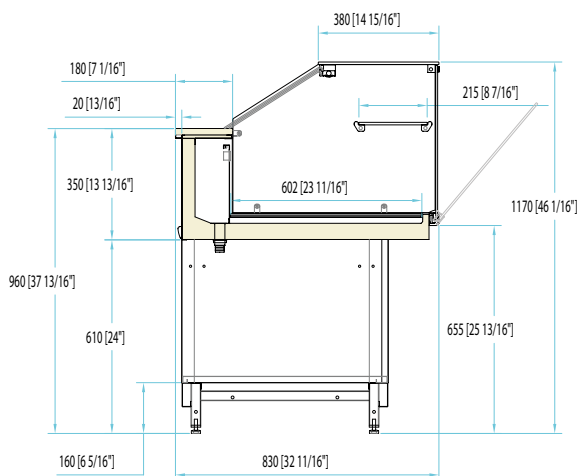

H117 Display cabinet with lighted tilt glass structure and refrigerated storage

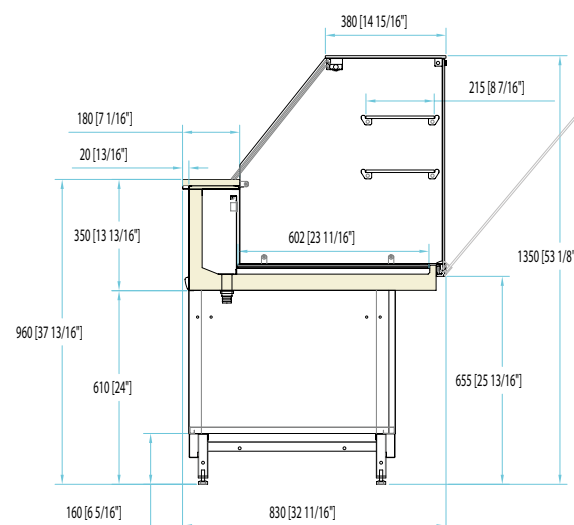


H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Cross sections TC BM


H 117-135

P 80


L 100-125-150

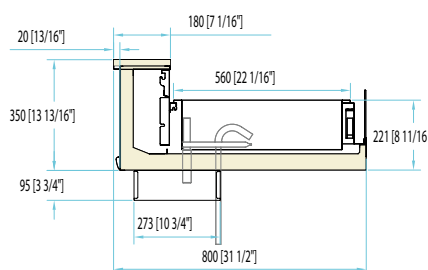


Well

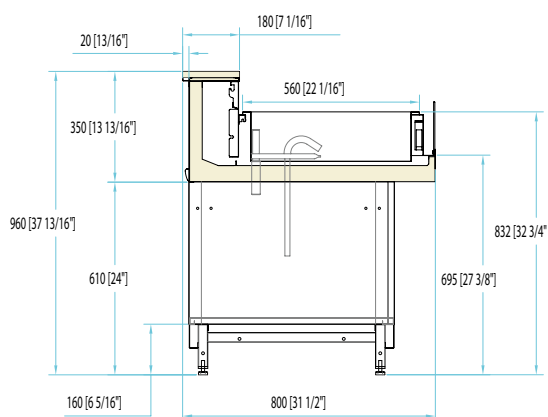

Well on neutral counter base

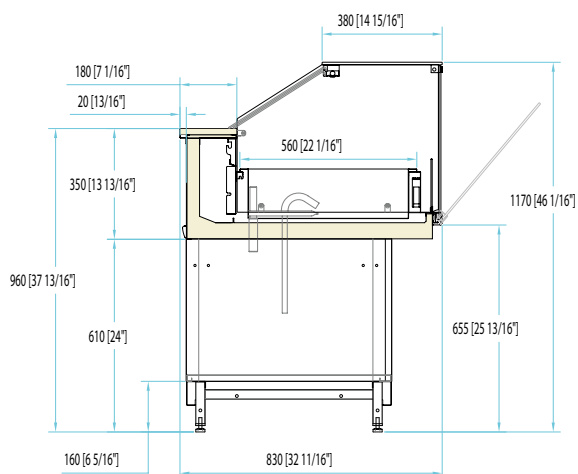

H117 Display cabinet with lighted tilt glass structure and refrigerated storage

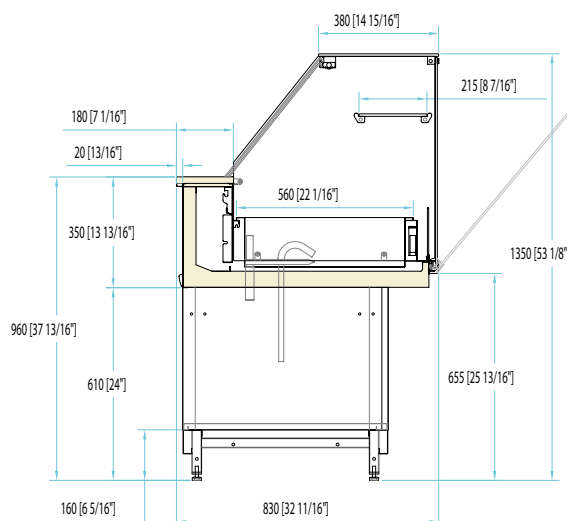

H135 Display cabinet with lighted tilt glass structure and refrigerated storage

Technical data

UCB plug-in condensing unit

MODULE LENGTH	100	125	150	175	200
Climate class	3				
Climate conditions	25°C/60% UR				
Ventilated refrigeration operating temperature	+4/+8 °C				
Chocolate display operating temperature	+14/+16 °C				
Hot plate operating temperature	65 °C				
Compressors [q.ty/ type]	1/ hermetic				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Refrigerant	R290				

VENTILATED

Heat extraction rate (Ørun) [W@-10]	721	721	934	934	1099
Rated absorbed power [W/A]	411/2,9	418/3	498/3,6	504/3,65	567/4,1
Absorbed power during defrost [W/A]	56/0,4	63/0,45	78/0,56	84/0,61	97/0,7
Energy class					

STATIC

Heat extraction rate (Ørun) [W@-10]	721	721	721	934	1099
Rated absorbed power [W/A]	296/2,14	302/2,2	347/2,5	353/2,56	408/2,9
Absorbed power during defrost [W/A]	43/0,3	49/0,35	57/0,41	63/0,46	70/0,5

CHOCOLATE DISPLAY

Heat extraction rate (Ørun) [W@-10]	721	721	721	934	934w
Rated absorbed power [W/A]	595/2,69	502/2,72	597/3,2	603/3,3	788/4,3
Absorbed power during defrost [W/A]	242/1,32	249/1,35	307/1,66	313/1,7	450/2,44

DRY HEAT

Rated absorbed power [W/A]	740/3,6	930/4,5	1120/5,4	1320/6,4	1500/7,2
----------------------------	---------	---------	----------	----------	----------

VENTILATED REFRIGERATION - UCR remote condensing unit

MODULE LENGTH	100	125	150	175	200
Refrigerants	R404A/ R452A				
Climate class	4				
Climate conditions	30°C/55% UR				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power [W/A]	56	63	78	84	97
Absorbed power of remote condensing unit [W]	486	486	760	760	660
Condensing unit weight [kg]	14,8	14,8	20	20	25,5
Condensing unit dimensions LxDxH[mm]	480x330x295	480x330x295	500x330x297	500x330x297	490x385x295
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

STATIC REFRIGERATION - UCR remote condensing unit

MODULE LENGTH	100	125	150	175	200
Refrigerants	R404A/ R452A				
Climate class	4				
Climate conditions	30°C/55% UR				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power [W/A]	43	49	57	63	70
Absorbed power of remote condensing unit [W]	486	486	486	760	660
Condensing unit weight [kg]	14,8	14,8	14,8	20	20
Condensing unit dimensions LxDxH[mm]	480x330x295	480x330x295	480x330x295	500x330x297	500x330x297
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

CHOCOLATE DISPLAY - UCR remote condensing unit

MODULE LENGTH	100	125	150	175	200
Refrigerants	R404A/ R452A				
Climate class	4				
Climate conditions	30°C/55% UR				
Defrost	compressor off-cycle				
Power Supply [V/hz]	230/50				
Absorbed power [W/A]	243	249	307	313	450
Absorbed power of remote condensing unit [W]	486	486	486	760	760
Condensing unit weight [kg]	14,8	14,8	14,8	20	20
Condensing unit dimensions LxDxH[mm]	480x330x295	480x330x295	480x330x295	500x330x297	500x330x297
Refrigerant piping diameter: Liquid/Suction 0-15mt	12/8	12/8	12/8	12/8	12/8
Refrigerant piping diameter : Liquid/Suction 16-30mt	14/8	14/8	14/8	14/8	14/8

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: iah@nt-rt.ru || сайт: <https://isa.nt-rt.ru/>